

MODEL 8044AIO

AUDIO INPUT/OUTPUT CARD

The Model 8044AIO Audio Input/Output Card is a component of the IED 8000 Series™. It has four differential, electronically balanced inputs which can be switched to any of four buses, or straight through to its own output. It has four outputs with balanced line drivers. Any output can take audio from any of the four unbalanced audio buses, but two inputs cannot be switched to the same bus.

Each output has a digitally controlled amplifier (DCA) which is controlled by the on-board microcontroller (MCU). These DCAs have an adjustment range of 127 dB in 0.5 dB steps, 31.5 dB gain through 95.5 dB attenuation.

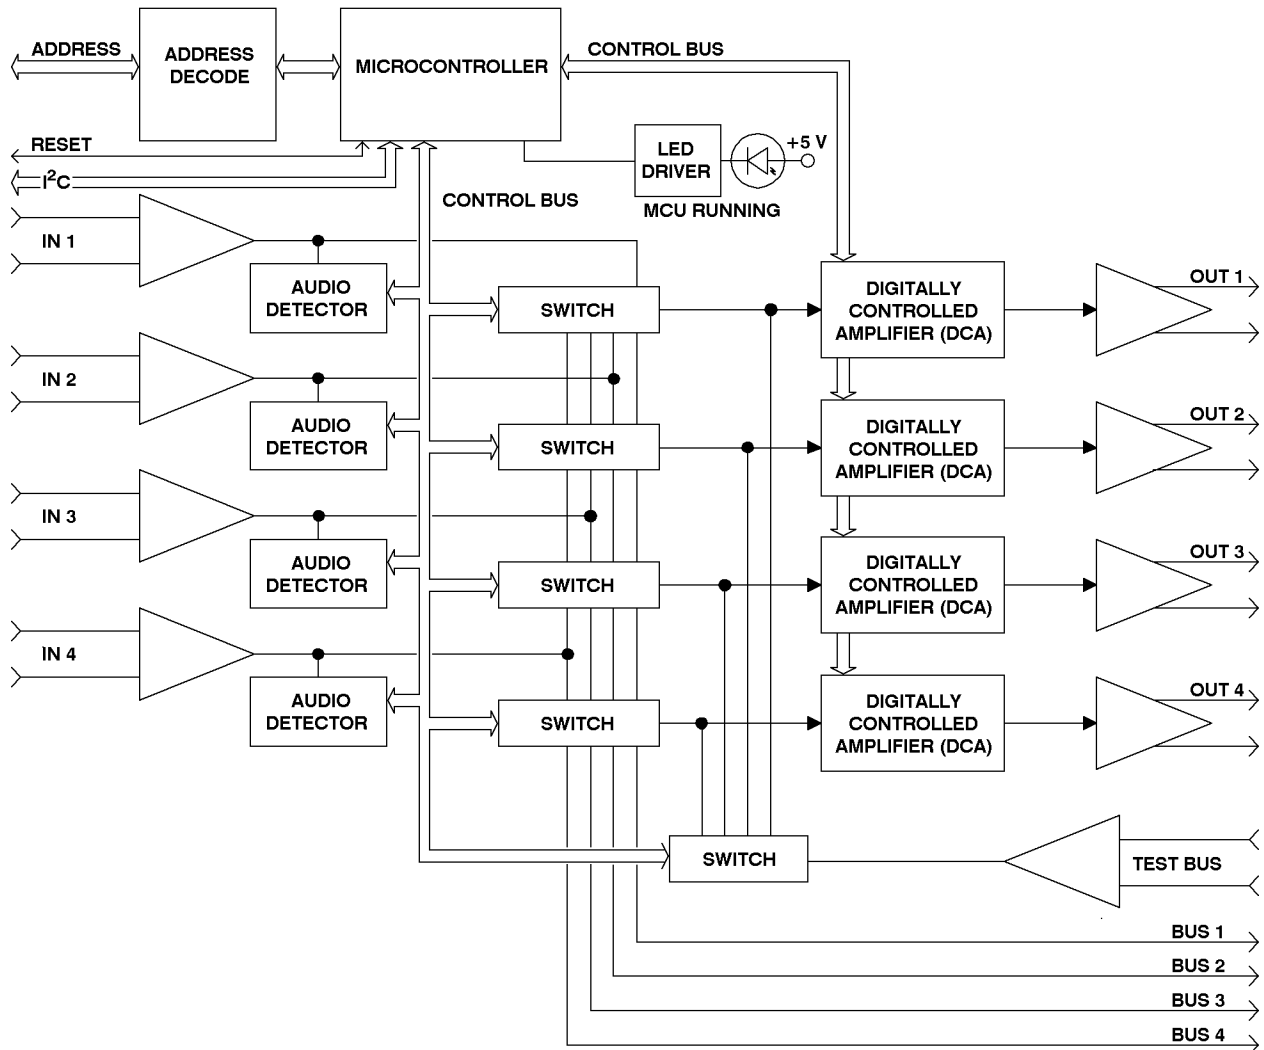


Figure 1 - 8044AIO Audio Input/Output Card Block Diagram



All switching is done under software control. Four buses which run the length of the mother board make it possible to source audio to/from other cards.

An Audio Test Signal Bus with a balanced input can be switched under software control to any output. The test tone will check the DCA, the output, and the MCU. This feature is used in conjunction with 8081MT cards and the 8001SA card to test audio points in the system with the 8000 Monitor/Test System. This feature also allows test tones to be introduced into output zones for testing of amplifier and speaker lines downstream of this card.

Also included is an audio detector circuit for each channel with speech-band filters and a level detector circuit. The audio detector is used to trigger events in the 8000 System (for example, to switch this input to a specified output).

The on-board microcontroller communicates with the 8001CPU and the 8001SA through an I²C bus on the mother board. A reset line from the mother board allows the MCU to be reset from the 8001CPU.

A green LED located on the front edge of the card is illuminated when the MCU is running.

*Innovative Electronic Designs, Inc. • 9701 Taylorsville Road • Louisville, Kentucky 40299 • USA
Phone: (502) 267-7436 • Fax: (502) 267-9070 • Internet: <http://www.iedaudio.com>*

SPECIFICATIONS

ELECTRICAL, ANALOG, $V_S = +15\text{ V}, -15\text{ V}$, DCA gain set to +6 dB

| | |
|--|----------------------|
| 1. Frequency Response | +0, -0.1 dB |
| 20 Hz - 20 kHz | |
| 2. Total Harmonic Distortion, THD. | <0.01% |
| 20 Hz - 20 kHz, 10 Hz - 80kHz filters | |
| 3. Intermodulation Distortion, IMD. | <0.03% |
| 60 Hz/7 kHz | |
| 4. Signal-to-Noise Ratio, S/N | > 90 dB |
| Referenced to +4 dBu, 20 - 22 kHz filters | |
| 5. Crosstalk. | < -70 dB |
| Between any 2 audio paths, 20 Hz - 10 kHz | |
| 6. DCA Control | |
| Range. | 127 dB |
| Steps | 0.5 dB |
| Card Max. Gain | 25.5 dB |
| Card Max. Attenuation | 105.5 dB |
| 7. Audio Detector Threshold | -22.5 dBu |
| f = 4 kHz | |
| 8. Maximum Input Level | +24 dBu |
| 9. Maximum Output Level | +24 dBu |
| $R_L \geq 600\ \Omega$ | |
| 10. Power Supply | |
| Supply Voltage Range | |
| +15 V Supply | +14.25 V to +15.75 V |
| - 15 V Supply | -14.25 V to -15.75 V |
| Supply current | |
| V= +15 V | |
| No audio input | 95 mA |
| Audio input = 18 dB, unity gain, $R_L = 600\ \Omega$ | 100 mA |
| V= -15 V | |
| No audio input | 70 mA |
| Audio input = 18 dB, unity gain, $R_L = 600\ \Omega$ | 77 mA |

INDICATORS

| | |
|--------------------------|-----------|
| 1. MCU running | Green LED |
|--------------------------|-----------|

CONNECTORS

| | |
|---|-------------------------|
| 1. 32-pin Euro Connector, male, right-angle (2 each). . . | Hirose PCN10-32P-2.54DS |
|---|-------------------------|

MECHANICAL

| | |
|---|-------------------|
| 1. Size (maximum overall dimensions as viewed from the front) | |
| Height. | (11.43 cm) 4.50" |
| Width. | (2.03 cm) 0.80" |
| Depth | (20.42 cm) 8.04" |
| 2. Weight | (162 gm) 0.358 lb |



ENVIRONMENTAL

- 1. Operating Temperature Range (+32 °F - +104 °F) 0 °C - +40 °C
- 2. Storage Temperature Range (-40 °F - +158 °F) -40 °C - +70 °C

| PIN | FUNCTION | PIN | FUNCTION |
|-----|------------------|-----|------------------|
| 1 | Channel 4 Out + | 17 | Channel 4 Out - |
| 2 | Channel 4 Shield | 18 | Channel 3 Shield |
| 3 | Channel 3 Out + | 19 | Channel 3 Out - |
| 4 | Ground | 20 | Ground |
| 5 | Channel 2 Out + | 21 | Channel 2 Out - |
| 6 | Channel 1 Shield | 22 | Channel 2 Shield |
| 7 | Channel 1 Out + | 23 | Channel 1 Out - |
| 8 | Ground | 24 | Ground |
| 9 | Ground | 25 | Ground |
| 10 | Channel 4 In + | 26 | Channel 4 In - |
| 11 | Channel 4 Shield | 27 | Channel 3 Shield |
| 12 | Channel 3 In + | 28 | Channel 3 In - |
| 13 | Ground | 29 | Ground |
| 14 | Channel 2 In + | 30 | Channel 2 In - |
| 15 | Channel 2 Shield | 31 | Channel 1 Shield |
| 16 | Channel 1 In + | 32 | Channel 1 In - |

Table 1 - Pin Connections, Upper Euro Connector

*Innovative Electronic Designs, Inc. • 9701 Taylorsville Road • Louisville, Kentucky 40299 • USA
 Phone: (502) 267-7436 • Fax: (502) 267-9070 • Internet: <http://www.iedaudio.com>*

| PIN | FUNCTION | PIN | FUNCTION |
|-----|------------------------------|-----|--|
| 1 | Address Line 4 | 17 | Address Line 3 |
| 2 | Address Line 2 | 18 | Address Line 1 |
| 3 | Address Line 0 | 19 | I ² C Bus Interrupt Line (Inverted) |
| 4 | I ² C Serial Data | 20 | I ² C Serial Clock |
| 5 | +5 V | 21 | Master Reset Line |
| 6 | -15 V | 22 | -15 V |
| 7 | +15 V | 23 | +15 V |
| 8 | Spare 2 | 24 | Spare 3 |
| 9 | Ground | 25 | Ground |
| 10 | Ground | 26 | Ground |
| 11 | Ground | 27 | Ground |
| 12 | Audio Test Bus + | 28 | Audio Test Bus - |
| 13 | Audio Monitor Bus + | 29 | Audio Monitor Bus - |
| 14 | Audio Test Signal Bus + | 30 | Audio Test Signal Bus - |
| 15 | Internal Audio Routing Bus 2 | 31 | Internal Audio Routing Bus 1 |
| 16 | Internal Audio Routing Bus 3 | 32 | Internal Audio Routing Bus 4 |

Table 2 - Pin Connections, Lower Euro Connector

This page left blank intentionally

*Innovative Electronic Designs, Inc. • 9701 Taylorsville Road • Louisville, Kentucky 40299 • USA
Phone: (502) 267-7436 • Fax: (502) 267-9070 • Internet: <http://www.iedaudio.com>*