



LAN-BASED ACS


2006
Fact Sheet

IED'S LAN-BASED ANNOUNCEMENT CONTROL SYSTEM®

Fully Digital Ethernet Audio

At the forefront of innovation, IED introduces a new Announcement Control System® which includes fully digital and Ethernet audio based components. From the microphone stations to the power amplifiers, the entire ACS system utilizes standard Ethernet.

The IED 500ACS® provides dynamic audio routing technology, which assigns, manages, and distributes uncompressed real-time digital audio over a Fast Ethernet network, using technology licensed from Cirrus Logic®. By utilizing standard Ethernet components for the transport of multi-channel audio and control data, IED allows facility owners the ability to integrate the 500ACS® into their facility network backbone and structured premises cabling system, greatly reducing the cost of conduit and cable.

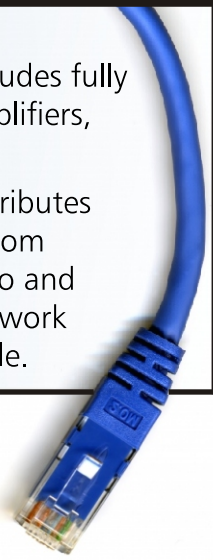

ALL NEW COMPONENTS AND FEATURES

- Ethernet compatible audio distribution
- Utilizes structured premises cabling with standard Ethernet
- Off-the-shelf Ethernet switches and network hardware
- Direct Ethernet interface provided on each of the IED Mic Stations, Power Amp Mainframes, and ACS Mainframes
- IP Addressing for all IED devices
- Compatible with TCP/IP and other protocols
- ACS ToolSet software utilizes standard SQL database structure

THE MAIN COMPONENTS FOR THE LAN-BASED ACS INCLUDE:

TITAN SERIES DSP POWER AMP SYSTEM

- 16 x 200W Power Amplifiers
- Backup Amp Switching w/ Hot Standby
- DSP for 16 channels
- Internal Monitor/Test System

The Titan Series DSP Power Amp System provides digital signal processing and 16 channels of 200 watt amplification in just 6 rack spaces. The Titan Series frame includes the Ethernet audio interface to IED's dynamic audio bus structure, and the signal processing to support 16 amplifier channels.




IED TITAN 6472 CARD

The Titan frame also includes 16 main channels of 200 watt power amplifiers plus two channels of spare hot/standby amplifiers that can be switched-in in the event of amplifier card failure. Monitor/Test functions, for full system diagnostics of audio signal, amp cards, and loudspeaker circuits are all internal. No external Monitor/Test wiring required. Additionally, IED 540S Ambient Noise Sensors can connect to the Titan Series Amplifier Mainframe or a separate Ambient Sensor Collector.

More on reverse...

ACS MAINFRAME AND CARDS

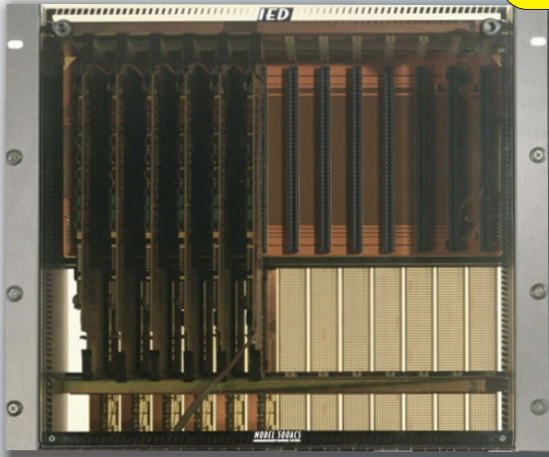


Fully redundant embedded processor cards power the new IED ACS Mainframe. The IED 510CPU can run as a single CPU or as an optional dual/redundant CPU utilizing two 510CPU cards in a tandem configuration. The IED 510N ACS Audio Network Card provides the Ethernet audio interface for the ACS mainframe. This card dynamically routes and assigns the audio busses among the IED Mic Stations, ACS Mainframe, and Titan Series DSP Amplifiers. The 510N card also provides the Ethernet audio interface between ACS mainframes in multiple buildings.

518 Mic Digital Mic Stations

The IED 518 Series Digital Mic Stations introduce a whole new level of sophistication and flexibility with Ethernet connectivity. A powerful processor enables the 518 Series Digital Mic Stations to perform additional functions like adjusting the angle, contrast, and brightness of the LCD display. The Mic Stations are fully compatible to 802.3af standards for power over ethernet (POE), and Mic Station power can be provided directly from the POE switch. Each 518 Mic Station is a network appliance with its own unique IP address, which makes its configuration and hardware management a snap with the updated ACS ToolSet software.



SAMPLE IED COMMUNICATIONS SYSTEM

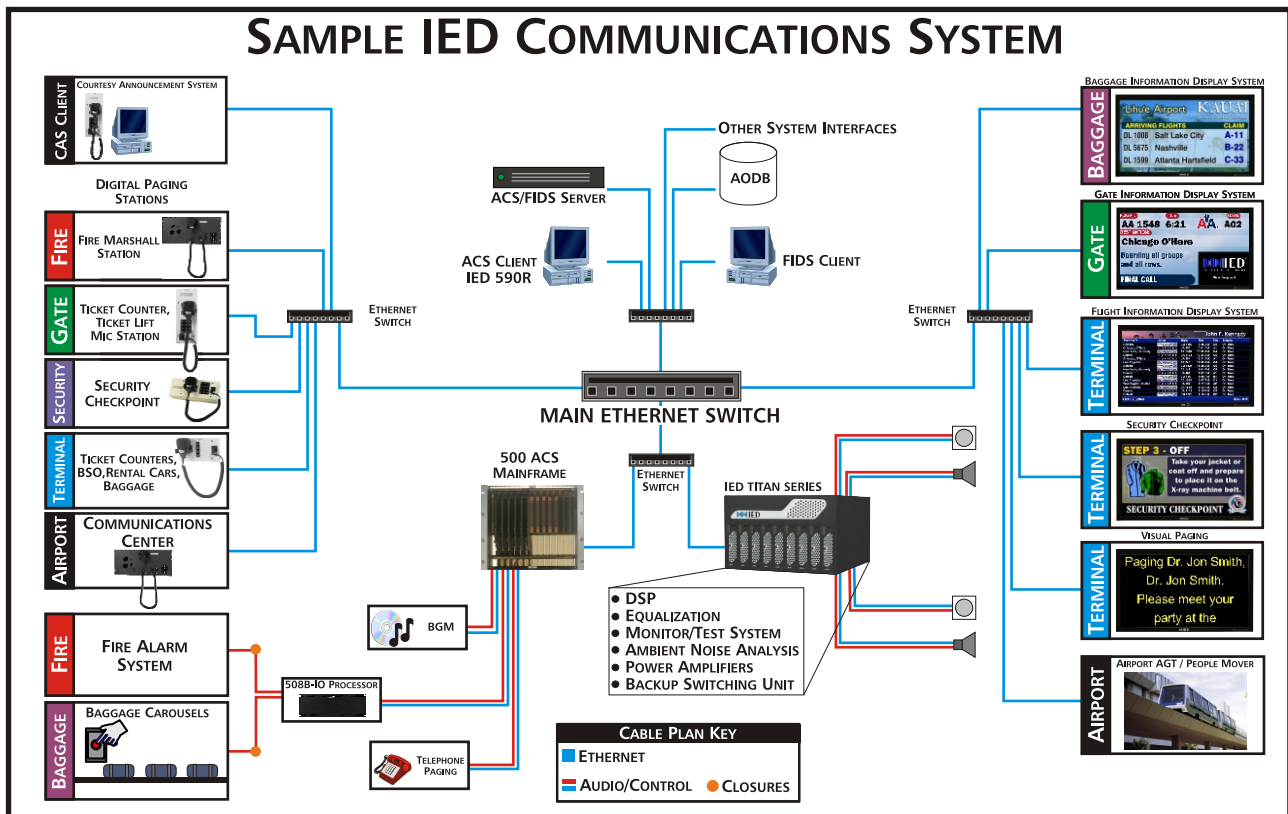

INNOVATIVE ELECTRONIC DESIGNS
9701 TAYLORSVILLE ROAD
LOUISVILLE, KY

PHONE: (502) 267-7436
FAX: (502) 267-9070
WEB: [HTTP://WWW.IEDAUDIO.COM](http://www.iedaudio.com)